

Product Data Sheet

HYDRO-BIODIVERSE PLUG PLANT LIVING ROOF

Comprising a water retention and drainage layer with bonded filter fleece, contoured growing medium and environment specific plug plants

Axter's living or green roof systems are designed to accommodate the most varied ecological and environmental requirements. The combination of long-term system performance with horticultural expertise ensures full compliance with national, local and project specific environmental biodiversity and attenuation criteria.

A living roof, as well as being an aesthetically pleasing addition to a building, offers many other advantages:

- Increased biodiversity, creating habitat for birds, bees and invertebrates.
- More usable space on the roof (e.g. for gardens, amenity, play and educational areas).
- Less urban heat island effect.
- Reduced rainwater run off flow rates.
- Better air filtration.
- Increased sound insulation and thermal efficiency.



Biodiverse living roofs are designed to create a habitat for a specific requirement of flora and fauna and are generally designed as part of an extensive green roof. Also referred to as brown roofs sometimes, they are often designed to replicate the original footprint of the building or are created to enhance the pre-development habitat with additional plant species. The growing medium is purposely selected to allow indigenous plant species to cover the roof over time.

Key benefits

- Landscaped areas with different contour levels attract different wildlife.
- Increases indigenous biodiversity of the development site.
- Logs provide habitat for invertebrates.
- Wetland areas and ponds provide ecosystems for wildlife.
- Using seeds or plug plants of species that are indigenous to the locality.
- Reclaimed or recycled materials from the building site itself can be used.

Axter supplies specialist growing medium to suit the requirements of the planting regime but in many cases soil and spoil from the development site can be recycled and used on the roof. Various habitats can be created by contouring the soil, providing different substrates, soil, rocks, sand, gravel, crushed concrete and by adding features such as rotting wood and ponds. The aim is to develop a number of different environments on the roof, each favouring different species and increasing biodiversity.

Hydro-biodiverse Living Roof options:

HYDRO-BIODIVERSE WILDFLOWER

HYDRO-BIODIVERSE SEED


HYDRO-BIODIVERSE PLUG PLANT

Hydro-Biodiverse Plug Plant Living Roof


- Water retention and drainage layer (20mm).
- Filter layer (1mm).
- Biodiverse substrate layer 100mm (substrate surface contour +/- 20mm) flora/fauna biodiversity.
- Environment specific plug plants (15-20 plants/m²) for biodiverse extensive living roof system.
- Micro-habitat creation (seasoned logs, rocks).



Water retention and drainage layer (20mm)



High compressive strength, rigid HDPE board acting as both drainage and water retention layer, with a geotextile filter layer bonded to one side. The board is dimpled and contains high capacity dimples (height approx. 20mm) for water retention and perforations to drain surplus water. It is resistant to root penetration and to chemicals.

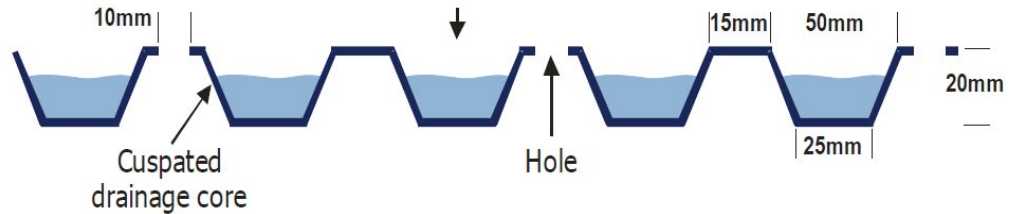

Drainage sheet (cusped, perforated)	Test Standard	Units	Value
Polymer	High Density Polyethylene		
Cusate height		mm	20
Compressive strength	EN ISO 25619-2	kPa	115
Tensile strength (MD/CMD)	EN ISO 10319	kN/m	17
Static Puncture (CBR)	EN ISO 12236	kN	2.6
Perforations per m ²			49
Perforations diameter		mm	10
Thickness @ 2kPa	EN ISO 9863-1	mm	21
Water flow through perforations	EN ISO 11058	l/(m ² .s)	24
Water storage capacity		l/m ²	4
Roll dimensions		m	0.97 x 50
Roll diameter (approx.)		m	1.1
Roll weight (approx.)		kg	60

Geotextile

Polymer	Polypropylene		
Water permeability (V _{H50})	EN ISO 11058	l/(m ² .s)	100
Apparent opening size	EN ISO 12956	µm	80

Filter layer (1mm)

Fleece filter layer for use on all sedum and biodiverse living roof systems. Manufactured using UV stabilised polypropylene, it provides high tensile properties and excellent durability. Its high density and strength, resulting from re-orientation of the molecules within the fibres during manufacturing, increase its environmental resistance and mechanical properties. It is resistant to root penetration and to chemicals.

The filter layer should be covered within one month of installation.

Expected durable service life of the material is up to 50 years in soils with $4 < \text{pH} < 9$ and soil temperatures $< 25^{\circ}\text{C}$, based on a durability assessment.



Physical properties	
Composition	Non-woven geotextile made from 100% virgin polypropylene high tenacity fibres, heat treated, needle punched, containing UV inhibitor
Weight (g/m ²)	123
Colour	White
Unit supplied	Rolls: Unit width (lm) 1.13 x Unit length (lm) 100
Roll weight (kg)	14
Thickness @ 2kPa (mm)	0.8

Technical properties	Value	Standard
Tensile strength (kN/m) – MD/CMD	9.0 – 9.8	EN ISO 10319
Elongation at max load (%) MD/CMD	60 / 65	EN ISO 10319
CBR static puncture (kN)	1.4	EN ISO 12236
Cone drop penetration (mm)	32	EN ISO 13433
Apparent opening size (µm)	80	EN ISO 12956
Water permeability (l/m ² .s)	100	EN ISO 11058
Weathering 50 MJ/m ² (1 month)	>90% retained strength	EN ISO 12224

Substrate layer (100mm)

Moisture retentive, low nutrient, free draining when saturated, allows root penetration. A special mix of organic material with clean and screened aggregates recycled from certifiable building industry waste products. Suitable for use on extensive wildflower and biodiverse roof systems. Green waste meets PAS 100 standards.

Physical properties	
Composition	Recycled crushed brick/mineral and composted green waste (certified PAS 100)
Brick grading	Various sizes of graded brick to promote a more biodiverse environment
Colour	Dark brown
Suggested depth	80 - 150mm
Sizes	25 litre sacks and bulk bags

Technical properties	
Weight (dry)	790kg/m ³
Weight (saturated)	970kg/m ³
Compaction	Approx 15% (+/-3%)
pH	7.5 – 8.5

Recommended minimum substrate depth is 100mm.

Environment specific plug plants

The plug plants combine a mixture of native species for use on living roofs – extensive, intensive, landscaping projects and podiums. The species chosen provide a variety of colour and habitat to attract pollinators and are propagated and germinated in UK nurseries resulting in them being acclimatised for use on living roofs in the UK.

The environment plugs can be used to meet local and national biodiversity action plans and BREEAM ecology credits. Further information is available from Axter.



Physical properties	
Material	Propagated and germinated in recycled green waste and mineral blend growing medium in a controlled environment, promoting stronger plant development.
Unit size	40 x 40 x 60mm
Plugs per tray	84
Recommended substrate	Approx 100mm
Recommended planting	15-20 per m ² . Substrate must be watered before and after planting and kept moist for at least 3 months following installation and in accordance with weather conditions.
Colour	Seasonal variation

Microhabitat Creation

Seasoned logs, rocks and a variety of substrates (sand, gravel, crushed concrete, etc) used to create different roof top environments each supporting a different species, to maximise biodiversity.

Maintenance

An annual maintenance programme for wildflower living roofs is recommended, to include two visits per year, one in the Spring (remedial) and one in the Autumn (cutting), when vegetation should be strimmed after flowers have seeded.

The substrate must be watered before and after planting and the system then kept moist for at least three months after installation and as weather conditions require. Further information is available in the Axter Living Roof Maintenance Guide.

Design Considerations

A living roof calls for a robust waterproofing system able to withstand the increased loads and suitable for the building structure.

The waterproofing for biodiverse and brown roofs can be either of a warm or inverted construction. Recommended Axter BBA / ETA certified, high performance waterproofing systems designed to fulfil this function are Cityflor and Wilotekt-Plus.

Each living roof is different, so we design bespoke solutions drawing on our many waterproofing options and including in the specification the planting selections best suited to the environment to ensure all roof and surrounding area criteria are met.

The following points must be included in the living roof design:

- Roof to be capable of supporting the design load.
- Adequate provision to drain excess rainwater.
- Safe access for maintenance.
- Robust and durable roof waterproofing.
- Root resistant membranes must be considered.

For further assistance with living roof design, specification, installation and maintenance, contact Axter.

Axter Ltd reserves the right to make changes without notice at any time to the above products. The values given are indicative and correspond to nominal results obtained in tests. Any additional installations must be discussed with Axter prior to their implementation

Final determination of the suitability of any information is the sole responsibility of the user. Consult Axter to discuss the use of this or any other product but responsibility for selection of a material and its application in any specific project remains with the user.

Axter Ltd reserves the right to modify and update this data at any time without prior notice. Only the latest version of this document is valid, available for download at www.axter.co.uk/downloads. Once downloaded, documents are uncontrolled. Users should always confirm they are referring to the latest version prior to use. Further assistance is available from Axter Ltd's Technical Support Team, email: technical@axterltd.co.uk, telephone: 01473 935008.

The intended use of this product should be verified with Axter Ltd prior to adoption to ensure its suitability and compliance with specifications, project requirements, industry regulations, legislation, good practice, installation techniques and all other relevant guidance. Axter Ltd accepts no liability for non-compliant use of this product.