

Product Data Sheet

STAINLESS STEEL SVP COVERS (Insert) Accessories

Vent pipe cover for the flashing of soil pipes penetrating the roof construction and the roofing membrane

The stainless Steel SVP Cover (insert version) is used for the flashing of soil pipes which penetrate the roof construction and roof waterproofing membrane.

Key benefits


- Quick and easy to install.
- Supplied with factory-fitted bonded flange compatible with either bitumen or synthetic roofing membranes.
- Provides a watertight flashing of the roofing membrane and an airtight extension of the soil pipe above the roof.
- Systematic and secure solution.
- Manufactured from high quality stainless steel.



Stainless Steel SVP Cover (Insert)

To suit vent pipe (outer diameter mm)	To suit vent pipe (internal diameter mm)	Pipe diameter (mm)	'O'-ring seal diameter (mm)	Membrane attachment
75	70-79	63	10	Bitumen or dark grey PVC
110	96-106	90		Bitumen or dark grey PVC
160	150-153	145	5	Bitumen or dark grey PVC

Height of vent cover above membrane level (not including cowl): 300mm
Spigot length: 250mm

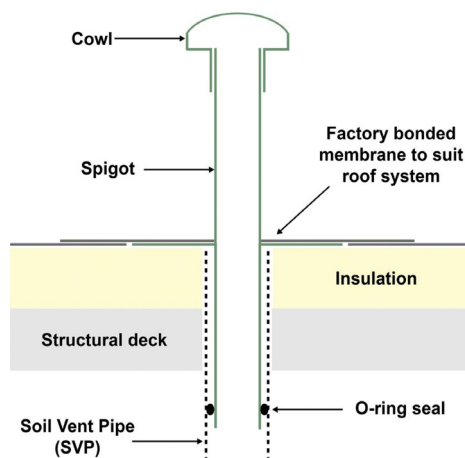

Axter Ltd reserves the right to modify and update this data at any time without prior notice. Only the latest version of this document is valid, available for download at www.axter.co.uk/downloads. Once downloaded, documents are uncontrolled. Users should always confirm they are referring to the latest version prior to use. Further assistance is available from Axter Ltd's Technical Support Team, email: technical@axterltd.co.uk, telephone: 01473 935008.

The intended use of this product should be verified with Axter Ltd prior to adoption to ensure its suitability and compliance with specifications, project requirements, industry regulations, legislation, good practice, installation techniques and all other relevant guidance. Axter Ltd accepts no liability for non-compliant use of this product.