

# Product Data Sheet


## STAINLESS STEEL SVP COVERS (New Build)

Accessories

**The twin-skin Stainless Steel SVP Cover is designed for the weatherproofing of soil vent pipes in new build applications. It provides long-lasting protection, concealing unsightly pipes and helping to reduce condensation problems.**

### Key benefits

- Twin-skin stainless steel cover provides long-lasting protection concealing unsightly pipes.
- 4 diameters available: 75mm, 110mm, 160mm, 250mm.
- Seals the vent pipe to the roof waterproofing system.
- Factory bonded flange matches the membrane being used.
- Internal pipe sits within the vent pipe with an 'O' ring seal against condensation.
- Adjustable cover suits pipes up to 600mm high supplied with stainless steel weather cowl to protect against rainwater and airborne debris.

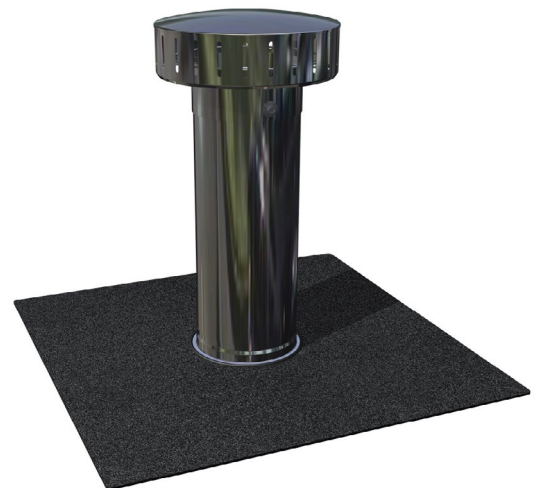


Used on flat roofs with either bitumen or single-ply systems, the Stainless Steel SVP Cover is supplied with a square factory-fitted flange to match the specific membrane being used, thereby providing an excellent bond.

Axter stainless steel SVP covers are adjustable from 320mm to 600mm high and are supplied with a stainless steel weather cowl to protect against rainwater and airborne debris entering the ventilation pipe.

## Stainless Steel SVP Cover

To suit vent pipe	Diameter of internal pipe (mm)	Diameter of outer pipe (mm)	'O'-ring seal diameter (mm)	Membrane attachment
3"	58	95	10	Bitumen or dark grey PVC
4"	87	125	8	Bitumen or dark grey PVC
6"	145	182	5	Bitumen or dark grey PVC
4"	87	250	8	Bitumen or dark grey PVC
Diameter of outer skin is greater to allow for knuckles and roof level obstructions				
Height of vent cover above membrane level: 335 – 600mm				

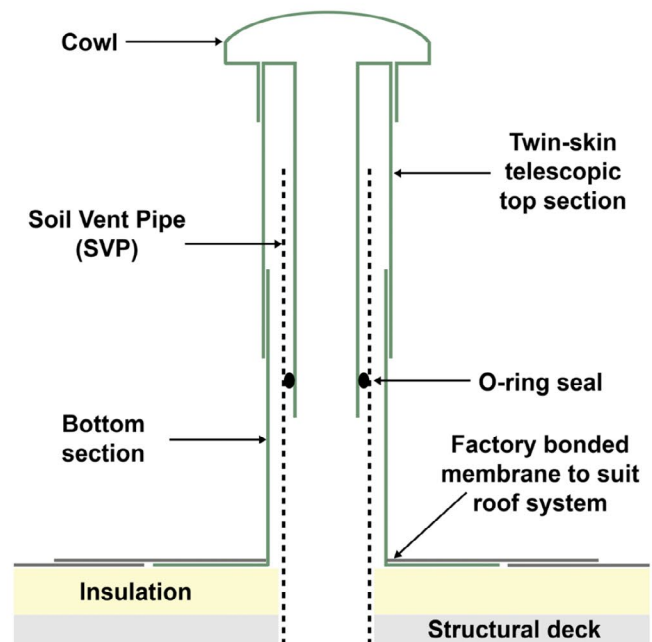

Axter Ltd reserves the right to modify and update this data at any time without prior notice. Only the latest version of this document is valid, available for download at [www.axter.co.uk/downloads](http://www.axter.co.uk/downloads). Once downloaded, documents are uncontrolled. Users should always confirm they are referring to the latest version prior to use. Further assistance is available from Axter Ltd's Technical Support Team, email: [technical@axterltd.co.uk](mailto:technical@axterltd.co.uk), telephone: 01473 935008.

The intended use of this product should be verified with Axter Ltd prior to adoption to ensure its suitability and compliance with specifications, project requirements, industry regulations, legislation, good practice, installation techniques and all other relevant guidance. Axter Ltd accepts no liability for non-compliant use of this product.